


Material SUJ 2(bearing steel)
 Handerning Depth more than 0.5 mm
 High-frequency induction hardening
 Surface roughness less than 1.5s
 Hardness more than HRC 58~64
 Tolerance of shaft diameter g6
 Plating Thickness 0.5~1.0

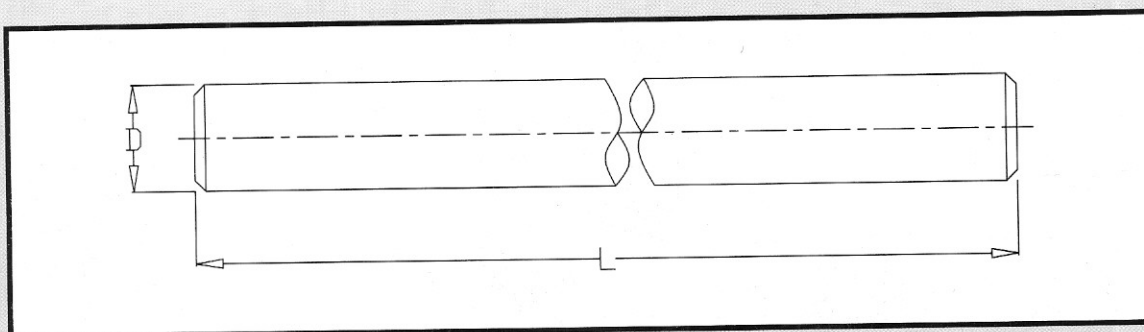

Diameter D mm	Type No. LCS	Tolerance g6 mm	Effective Case hardened Zone	Weight kgf/m	Diameter D mm
3	LCS 3	-2 -8	1.0 mm	0.06	3
4	LCS 4	-4 -12		0.10	4
5	LCS 5	-5		0.16	5
6	LCS 6	-6		0.23	6
8	LCS 8	-7		0.40	8
10	LCS 10	-7		0.62	10
12	LCS 12	-7		0.89	12
13	LCS 13	-6		1.04	13
16	LCS 16	-17		1.58	16
20	LCS 20	-7		1.5 mm	2.47
25	LCS 25	-20	3.85		25
30	LCS 30	-9	5.55		30
35	LCS 35	-9	7.55		35
40	LCS 40	-25	9.87		40
50	LCS 50	-10	2.5 mm	15.4	50
60	LCS 60	-10		22.2	60
80	LCS 80	-29		39.5	80
100	LCS 100	-12		61.7	100
120	LCS 120	-12		88.8	120
150	LCS 150	-34 -14 -39	3.0 mm	139	150