


Material SUJ 2(bearing steel)
 Handerning Depth more than 0.5 mm
 High-frequency induction hardening
 Surface roughness less than 1.5s
 Hardness more than HRC 58~64
 Tolerance of shaft diameter g6
 Plating Thickness 0.5~1.0

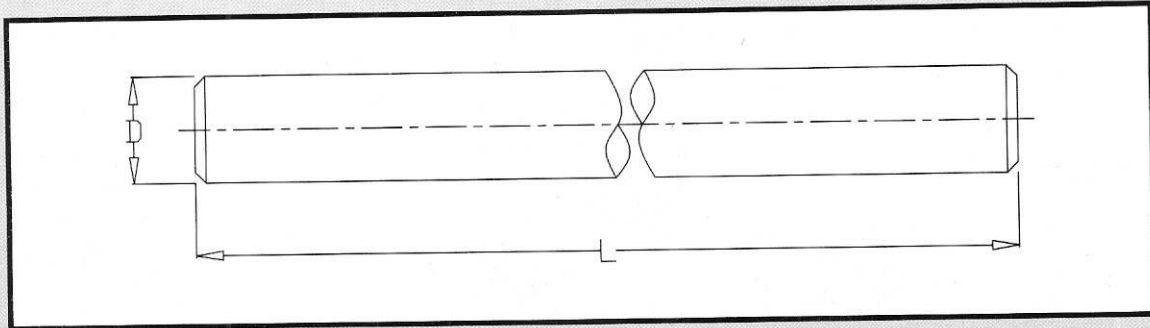

Diameter D mm	Type No. LCS	Tolerance g6 mm	Effective Case hardened Zone	Weight kgf/m	Diameter D mm
3	LCS 3	-2	1.0 mm	0.06	3
4	LCS 4	-8		0.10	4
5	LCS 5	-4		0.16	5
6	LCS 6	-12		0.23	6
8	LCS 8	-5		0.40	8
10	LCS 10	-14		0.62	10
12	LCS 12	-6		0.89	12
13	LCS 13	-17		1.04	13
16	LCS 16	-7		1.58	16
20	LCS 20	-20		2.47	20
25	LCS 25	-9		3.85	25
30	LCS 30	-25		5.55	30
35	LCS 35	-10	7.55	35	
40	LCS 40	-29	9.87	40	
50	LCS 50	-12	15.4	50	
60	LCS 60	-34	22.2	60	
80	LCS 80	-14	39.5	80	
100	LCS 100	-39	61.7	100	
120	LCS 120		88.8	120	
150	LCS 150		139	150	